



57.0 – 62.25 GHz Waveguide Band Pass Filter


P/N: QMC-BPF15-6005

Features

- Narrow Bandwidth
- Low Insertion Loss
- High Out of Band Rejection
- Full Waveguide Band

Parameter	Specification	Notes
Passband	57.0 – 62.25 GHz	
Insertion Loss	1.5 dB	2.5 dB max
Input / Output Return Loss	-15 dB	-10 dB max
Rejection		
Low Frequency	48 to 56 GHz	25 dB min
High Frequency	63 to 77 GHz	25 dB min

Measured Data (typical response)

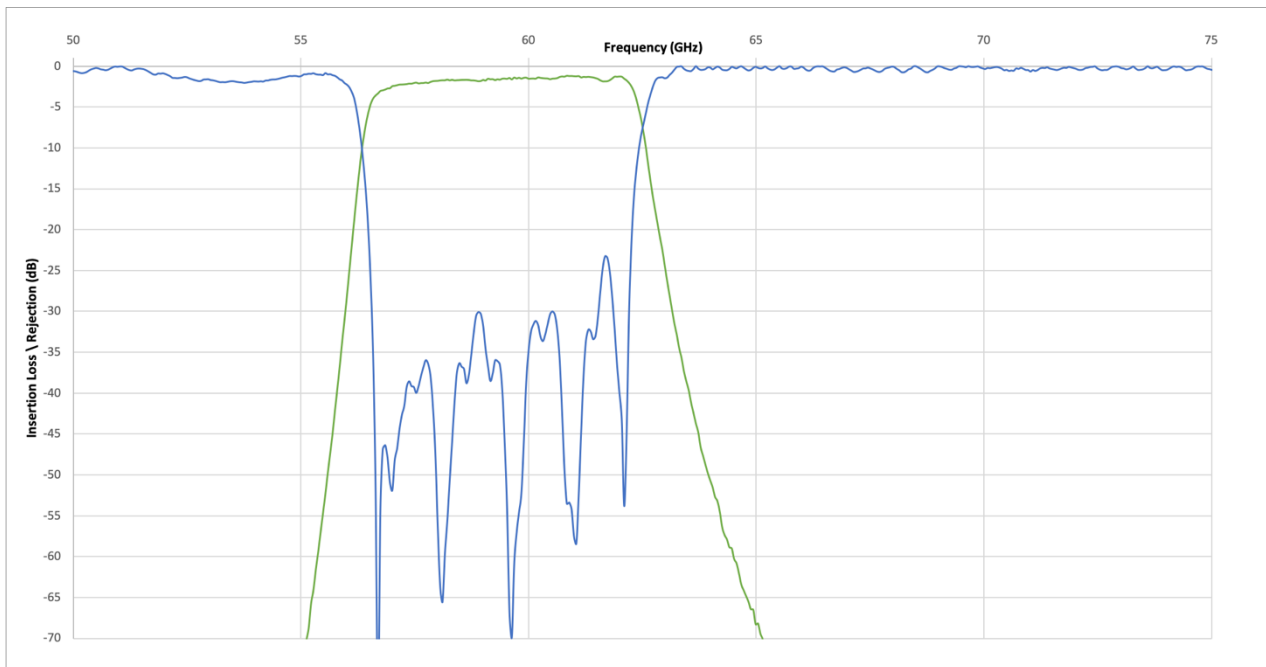

Outline Drawing

